


ANTISTATIC VACUUM CORD SERIES

The WHS-V3 series offers advanced vacuum cord solutions engineered for cleanroom environments requiring reliable, antistatic handling. Each cord is made from blue polyurethane with a 6.35 mm (0.250") outside diameter and features a black conductive inside ground path, ensuring both durability and ESD protection while maintaining flexibility, even in low-humidity conditions.

The WHS-V3-CC is the standard model, featuring a 1,8-meter (72") working length that retracts neatly when not in use, providing a compact, unobtrusive setup. It is designed for installation within 76 mm (3") of the front lip of a workstation or mounted on a wall or tool.


The WHS-V3-CC easily extends to full length, offering seamless mobility across workstations and into tools for wafer loading. For added durability, the WHS-V3-CCS model includes an internal spring cable,

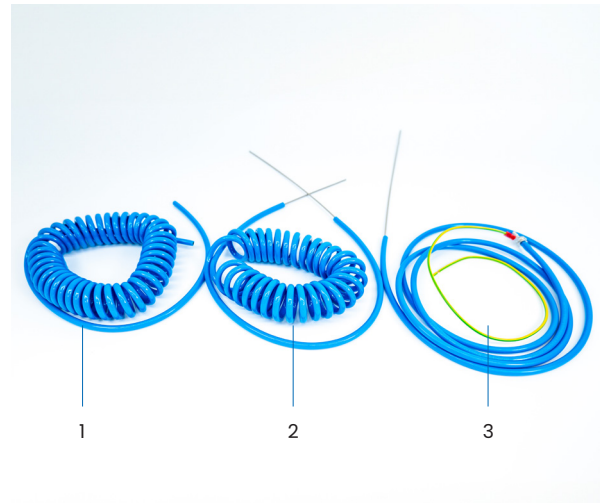

WHS-V3-CC



WHS-V3-CCS

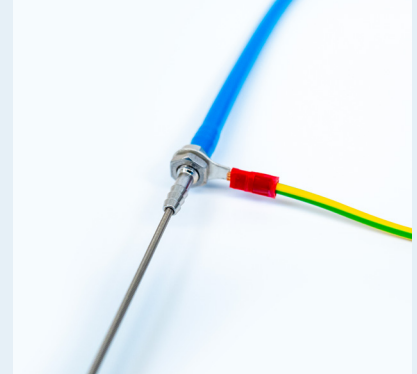

WHS-V3-SCS

enhancing the cord's anti-crimp properties, making it ideal for high-use environments where cord longevity is essential. The WHS-V3-SCS is a straight cord option with the same 2-meter working length but without the coiled design. Like the WHS-V3-CCS, it includes an internal spring cable and is further enhanced with ground fittings for additional stability and ESD protection.

All WHS-V3 cords are compatible with WHS vacuum wands and are constructed with a specially engineered durometer material. This gives the cords a lightweight, spring-like feel for smooth, ergonomic handling. The thick wall polyurethane construction resists crimping and prevents breakthroughs, ensuring long-term reliability.

These cords meet the highest standards for cleanroom safety, cleanliness, and performance.

FEATURES AND ADVANTAGES

- 6.35mm (0.250") OD with conductive ground path for ESD safety
- Durable, flexible polyurethane for cleanroom use
- WHS-V3-CC: coiled cord, retracts neatly
- WHS-V3-CCS: spring cable for added anti-crimping
- WHS-V3-SCS: 2-meter straight cord w/grounding

TABLETOP PORTABLE VACUUM WAND


ITEM	SPECIFICATIONS
Material, cord	Conductive polyurethan
Coils / dimensions	42-coils, 35 mm (1.375") coil OD
Dimension, OD	6.35 mm (0.250")
Dimension, ID	3.68 mm (0.145")
Working length	1,8-meters (72")
Cleanliness	ISO 3 (Class 1 FS209E)



ORDERING INFORMATION


WHS-V3-	CC
CODE	MODEL
CC	Coil cord, conductive polyurethane (1)
CCS	Coil cord conductive polyurethane, spring (2)
SCS	Vacuum cord straight, conductive polyurethane, 2-meter, Spring, Fitting (3)

REV062023

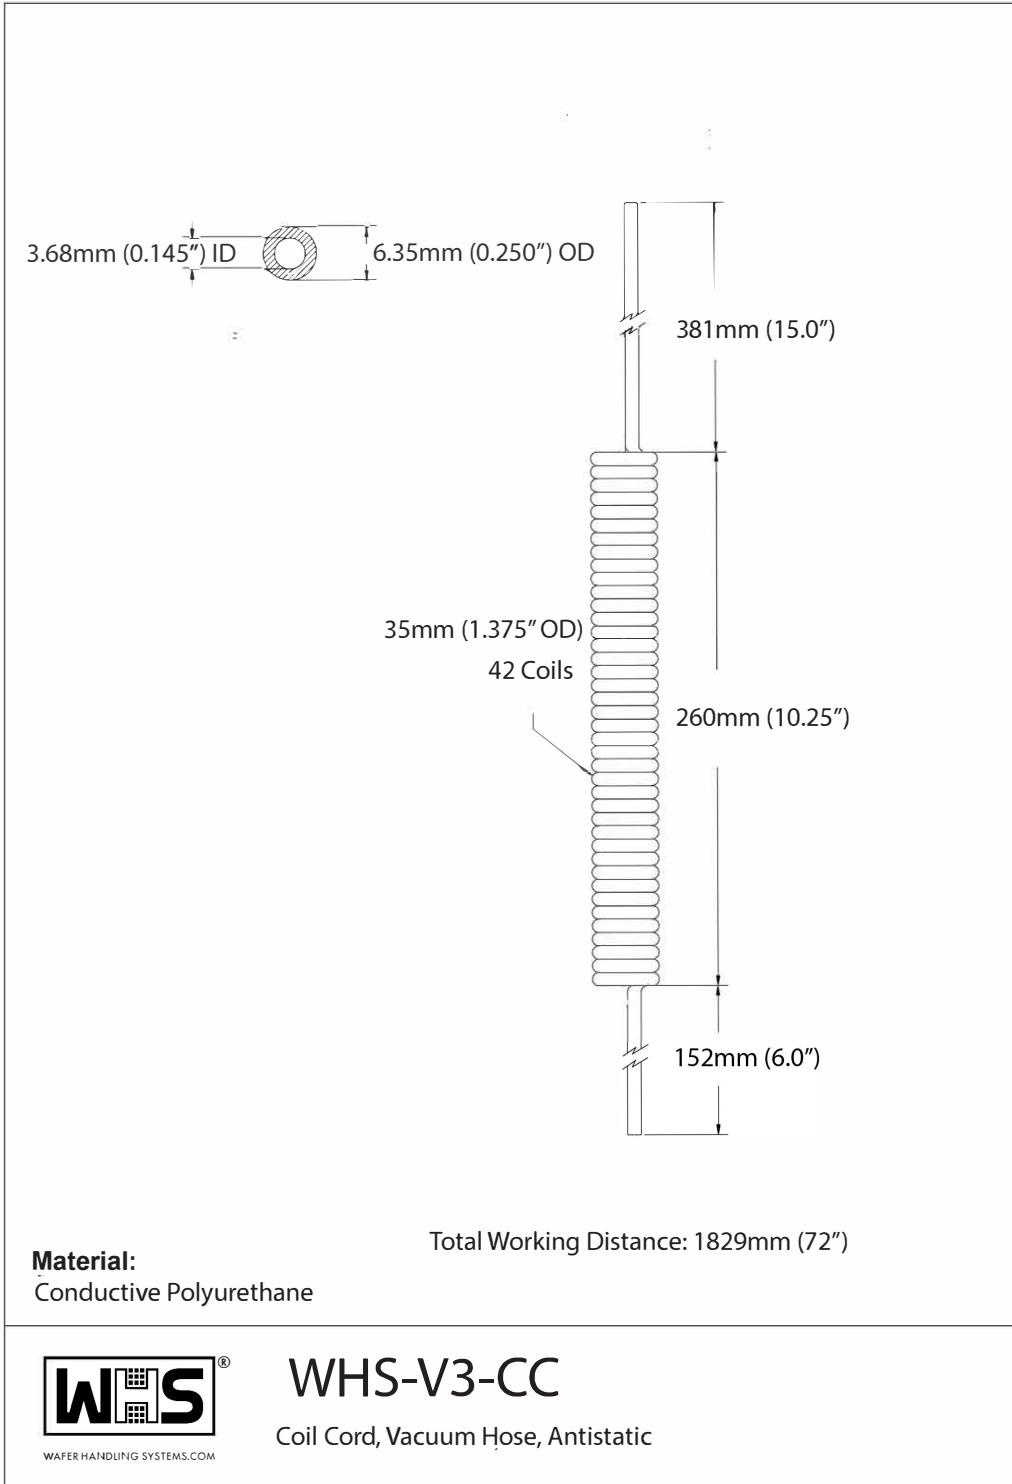


date: 01-10-2022 | scale: 1:2 | entity: mm | This drawing is owned by WHS trademark and may not be copied, reproduced or shown to third parties without written permission.

REV062023

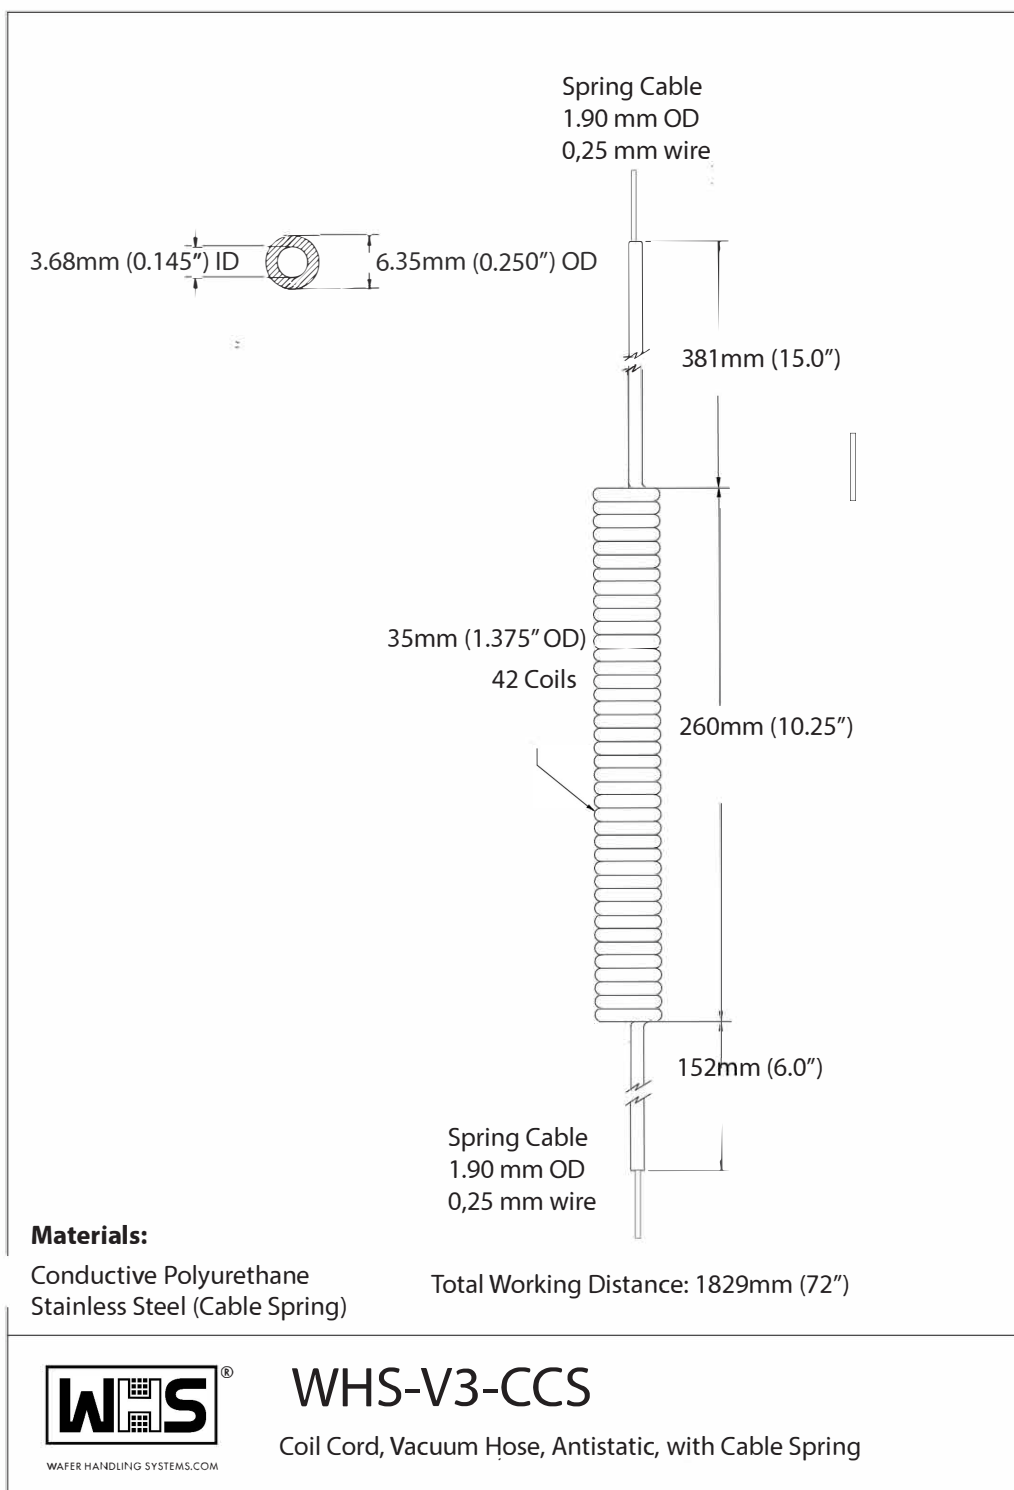

date: 01-10-2022 | scale: 1:2 | entity: mm | This drawing is owned by WHS trademark and may not be copied, reproduced or shown to third parties without written permission.

REV062023

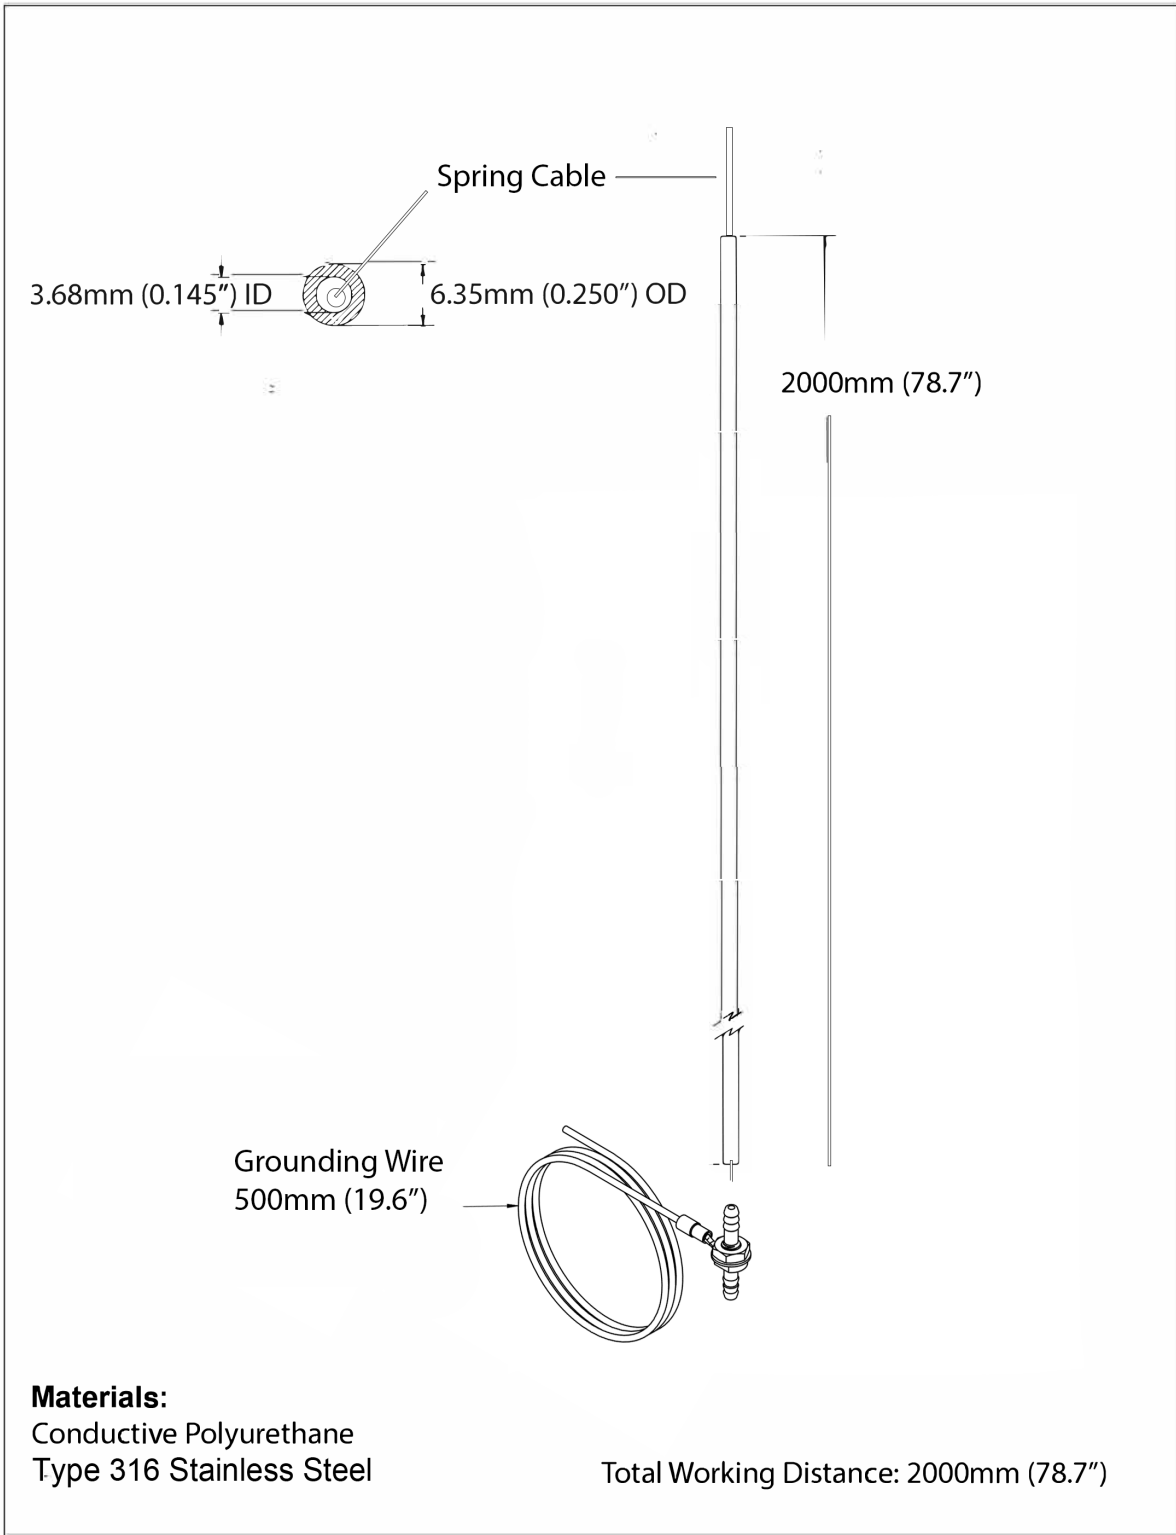

WHS-V3-SCS

Straight Cord, Conductive Polyurethane, 2-meter, Spring, Fitting

date: 01-10-2022 | scale: 1:2 | entity: mm | This drawing is owned by WHS trademark and may not be copied, reproduced or shown to third parties without written permission.

REV062023