


CMP-RF depth filter

CMP-RF depth filter is rolled with multilayer graded PP membrane. These PP media have a continuously tapered pore structure. Economical for polishing solutions.

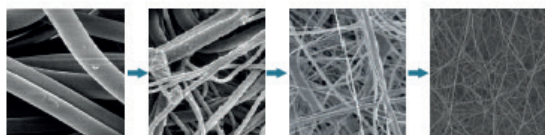

Deefine Nanofiber

ITEM	SPECIFICATIONS
Filter media	Deefine Nanofiber
Core	PP
Max. working temp.	80°C / 176°F
Max. working DP	0.4 Mpa / 25°C



Ordering Information

ESPRO-12-CMP-RF	010	2F	05	T
Code	Removal Rating	Adaptor	Length	Sealing
ESPRO-12-CMP-RF	010 0.10 µm	OD DOE	05 5"	/ No Seal
	020 0.20 µm	2F 222Spear	10 10"	E EPDM
	030 0.30 µm	2C 222Flat	20 20"	V Viton
	050 0.50 µm	6F 226Spear	30 30"	S Silicone
	070 0.70 µm	6C 226Flat	40 40"	T FEP/Viton
	100 1.00 µm	2EC 222Flat with lock		
	300 3.00 µm			
	500 5.00 µm			
	10T 10.0 µm			
	20T 20.0 µm			
	50T 50 µm			