

Surpass model RB relief valve

FEATURES

- Relief pressure can be easily adjusted using the knob
- Wide adjustment range of relief pressure allows for flexible pressure settings
- Fluororesin wetted parts provide excellent chemical resistance
- Easy connection with PFA tubing



MODELS

RB-□


Tube size 3/8:3/8" (ø9.53Xø6.35)
1/2:1/2" (ø12.7Xø9.53)

SPECIFICATIONS


Fluids	Relief pressure rate	Withstanding pressure	Fluid temperature	Ambient temperature	Connection	Wetted parts
Gas and liquid (DIW and chemicals)	50~400kPa	600kPa	5~70°C	5~60°C	Tube fitting	PFA, PTFE and perfluor O-ring

DIMENSIONS

- RB-□
- RBF-□
- RB-□-HT

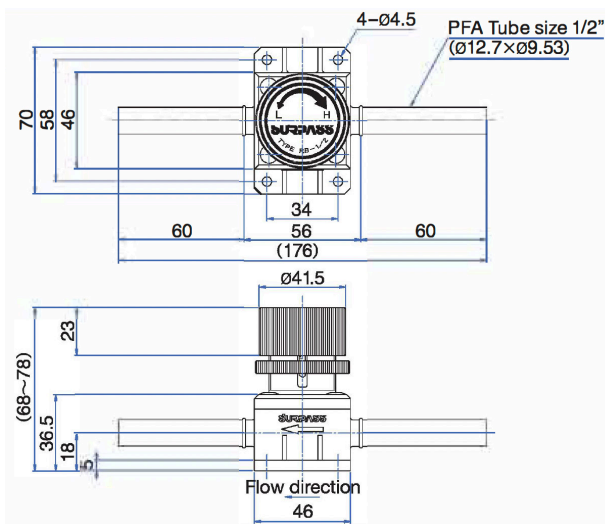

FLOW CHARACTERISTICS

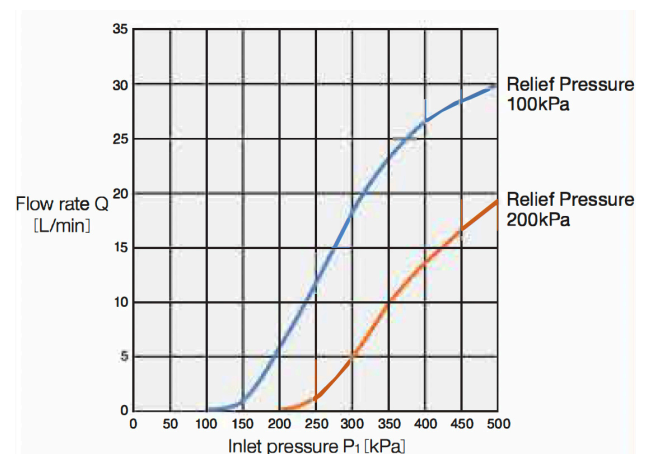

Fluid: DI water

Fluid/Ambient temperature: Room temp.

Cv value: 0.93 (Full open)

- The data is reference value, not a guaranteed value.