

# Surpass model RBF-SHT relief valve

## FEATURES

- Relief pressure can be easily adjusted using the knob
- Adjustable relief pressure range from 50 to 250 kPa to suit different applications
- All wetted parts are made of fluororesin
- Suitable for use at temperatures up to 180 °C

## MODELS

### RBF-1/2P300P-SHT


- └ Pillar Super 300 Type P series
- └ Tube size 1/2:1/2" (ø12.7Xø9.53)



## SPECIFICATIONS

Fluids	Relief pressure rate	Withstanding pressure	Fluid temperature	Ambient temperature	Connection	Wetted parts
Fluids (DIW and chemicals)	50-250kPa	350kPa	15-150°C	15-60°C	Tube fitting	PTFE

## DIMENSIONS

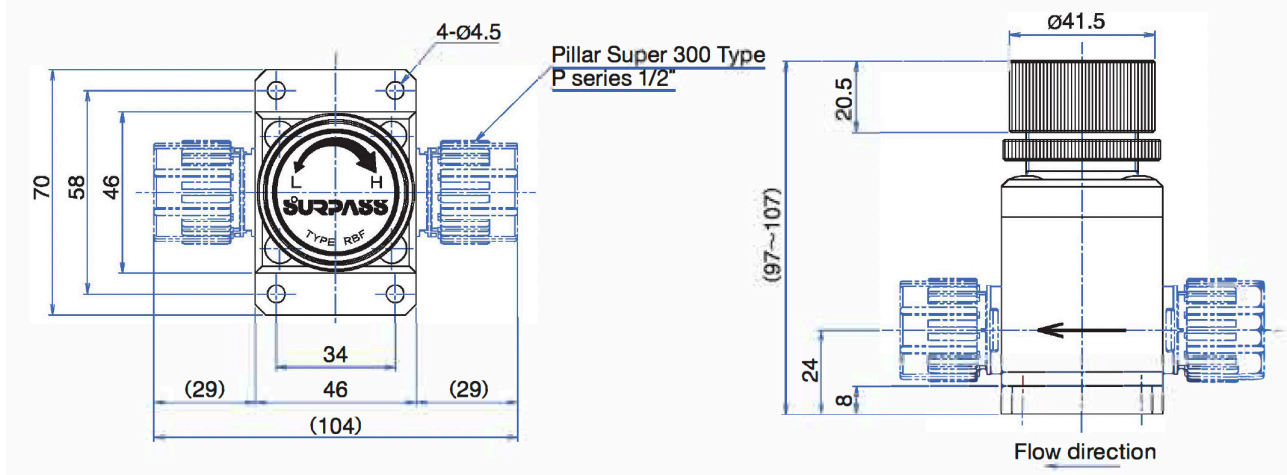

## SPECIAL INSTRUCTIONS

Be sure to use within the ambient temperature range.