


Surpass model FTX300P Check valve

FLOW CHARACTERISTICS

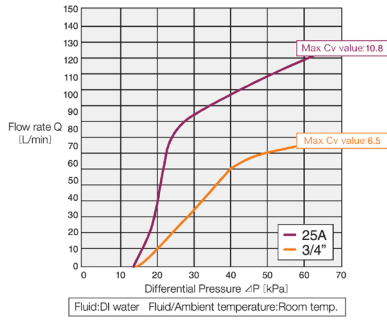

- The data is reference value, not a guaranteed value.

Specifications


Fluid pressure	0-400kPa
Withstandig pressure	500kPa
Cracking pressure	Approx. 20kPa

Fluid temperature	5-80°C
Ambient temperature	5-60°C
Fluid	Gas and liquid (DI water, chemicals)

Connection	Tube fitting nut space-saver type
Wetted parts	PFA, PTFE and Kalrez® O-ring
Mounting position	In any direction

DIMENSIONS

- FTX300P-□-K-RS

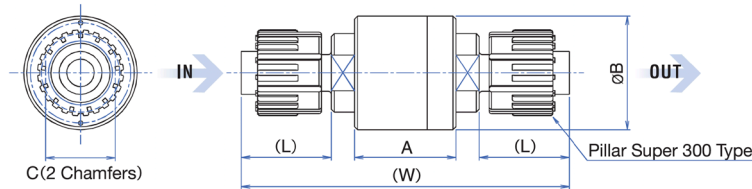

Note: When you use with gas, there might be a noise and vibration, this is not malfunction

MODELS/DIMENSIONS

Type	Connection size	A	ØB	C (2Chamfers)	(L)	(W)	O-ring
FTX300P-3/4-K-RS	3/4" (Ø19.05xØ15.9)	57	51	30	40	161	Kalrez®
FTX300P-25-K-RS	1" (Ø25.4xØ22.2)	60	61	40	47	184	