

Surpass SD-T Pneumatic valve

FEATURES

- Corrosion-resistant PTFE is used for all wetted parts, providing excellent chemical resistance and long-term durability.
- A proprietary simple structure with unique flow channels is incorporated into the design.
- An indicator is installed as standard to allow confirmation of the valve's operating condition.
- Polypropylene is used as the material for the actuator section.
- The flow path can be switched with one valve.




MODELS / SPECIFICATIONS

Type	SD-2P300P-T1
Fluids	Chemicals, DI water
Pressure range	0-400kPa
Back pressure	0-400kPa
Withstanding pressure	750kPa
Leak from valve	0mL/min (water pressure)
Fluid temperature	0-80°C
Ambient temperature	0-50°C
Wetted parts	PTFE
Connection type	Pillar super 300 type P series
Tube size	1/4" (Ø6.35xØ3.95)
Control port	Rc1/8
Operational pressure	400-500kPa
Operational frequency	Less than 20 operations/min
Mounting positions	Flexible
Valve operating specifications	NC

DIMENSIONS

- SD-2P300P-□ 1

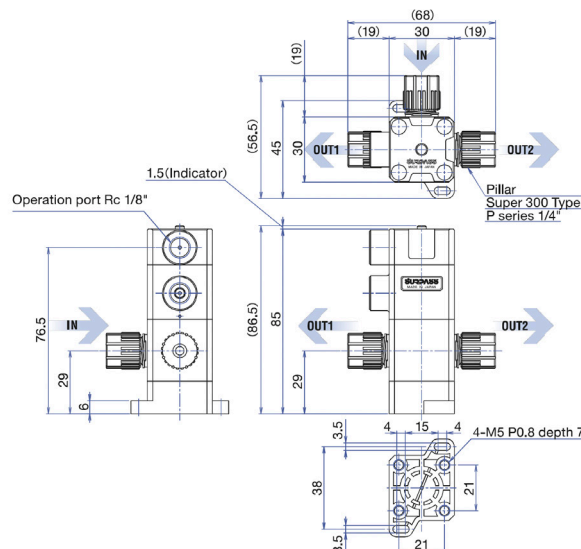

062026REV1

