

Surpass GSCR regulator

FEATURES

- Compact pressure reducing valve with a cost-effective molded design.
- Pneumatically operated type.
- Provides excellent constant-pressure control and high operational stability.
- Pressure loss is minimized through an optimized low-retention flow structure.

SPECIFICATIONS


Wetted parts	PTFE, PFA
Fluids	DI water, Chemicals
Fluid temperature	10~90°C
Ambient temperature	10~60°C
Inlet pressure range	100~600kPa
Withstanding pressure	800kPa
Pilot pressure range	Max. 400kPa
Pilot port	Rc1/8



MODELS

Type	Tube size	Connection size	Flow range	Outlet pressure range *depending on certain conditions
GSCR4-2P300P	1/4" (Ø6.35xØ3.95)	Pillar fitting	10-2000mL/min	50-300kPa
GSCR4-3P300P	3/8" (Ø9.53xØ6.35)	Pillar fitting	1~10L/min	50-300kPa
GSCR4-4P300P	1/2" (Ø12.7xØ9.53)	Pillar fitting	1~15L/min	50-300kPa

DIMENSIONS

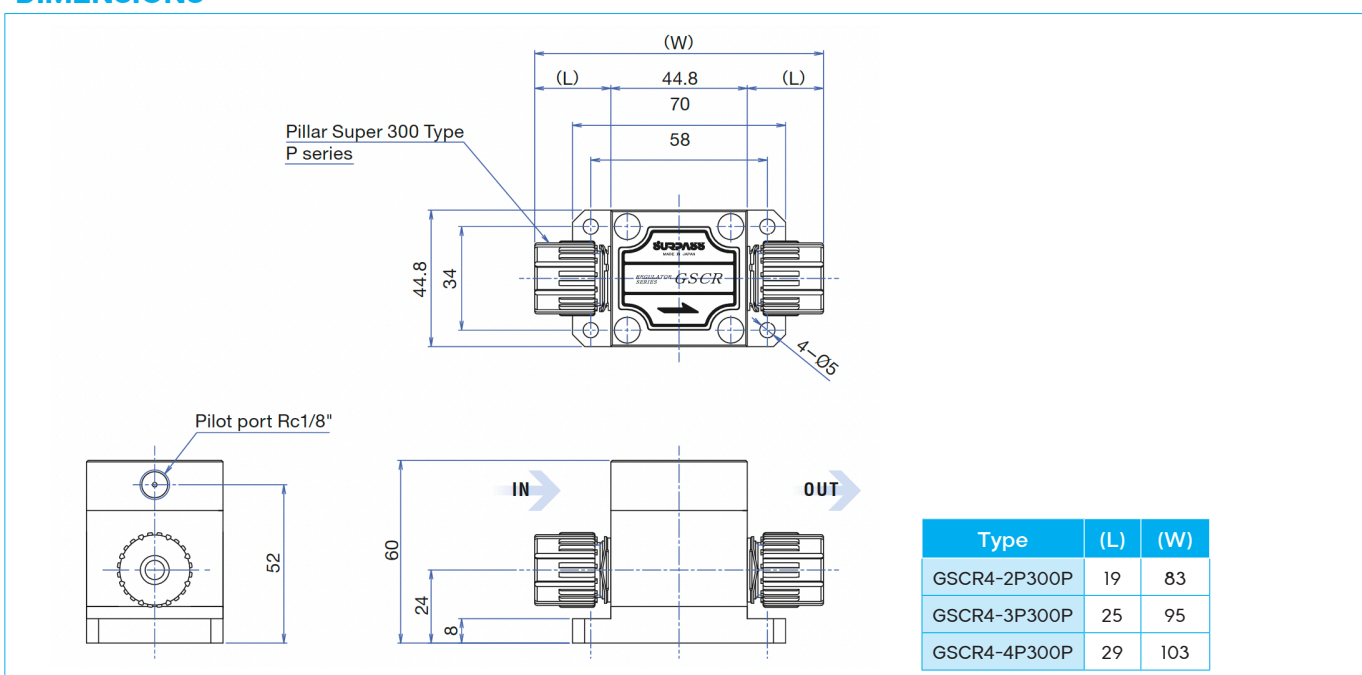

SPECIAL INSTRUCTIONS

- Leak rate of valve seat is less than 1mL/min. (water pressure)
- The regulator does not have shut-off function. (It is not design to be completely closed.)