


KL-91 Series PFA/PTFE Pressure Transmitter

DESCRIPTION

The KL91 is a pressure transducer suitable for use in monitoring pressure of various high-purity fluids. The superior design provides for minimal "dead volume" which reduces the potential for contamination of the measured fluid. The KL91 is available in two construction type: inline or insertion. The body construction meets IP-65 requirements and EMC resistant the level of CE.

OPERATION

The o-ring free design minimizes the generation of containment and the elution of metal, which makes it suitable for pressure monitoring in the semiconductor industry. All wetted parts are made of fluoropolymers (PFA, PTFE). The sensor is IP-65 rated to meet the application requirement for semiconductor's wet environments.

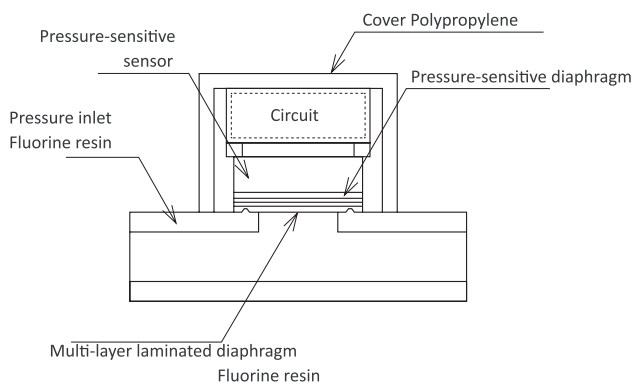

KEY FEATURES

- +/- 1% full-scale accuracy
- All PFA/PTFE wetted part construction and PTFE coating on Alumina Sensor
- No o-ring seals or fill fluids
- Choice of end fitting: Flare, Pillar, 20S or Tube

APPLICATIONS

- High-purity DI water, and CMP slurry
- Filtration condition monitoring
- General pressure monitoring


Measurement Specifications

Material of wetted parts	PFA / PTFE
Material of non-wetted parts	Polypropylene
Pressure Range	-15 to 80 psi
Allowable maximum pressure	120 psi
Temperature coefficient	+/- 0,05 % F.S. / deg. C
Power and supply current	24 VDC* $\pm$ 10% (2 wire system) 10 ~ 24 VDC (3 wire system)
Analog output	2 wire: 4 ~ 20 mA DC (Load Resistance: 500 Ω max. at 24 VDC) 3 wire: 1 ~ 5 VDC , 0 ~ 10 VDC (Load Resistance: 10 k Ω min.)
Accuracy	$\pm$ 1% F.S.
Connection sizes	1/4" , 3/8" , 1/2" , 3/4" , 1"
Operating temperature range	10 to 80°C
Operating humidity range	25 to 80% RH (no condensation inside sensor)
Protection	IP-65
Cable Length	2 m
Weight	180 g (with cable)


DIMENSIONAL AND CUT-AWAY DRAWINGS

In-line Design

[Tube stub version]

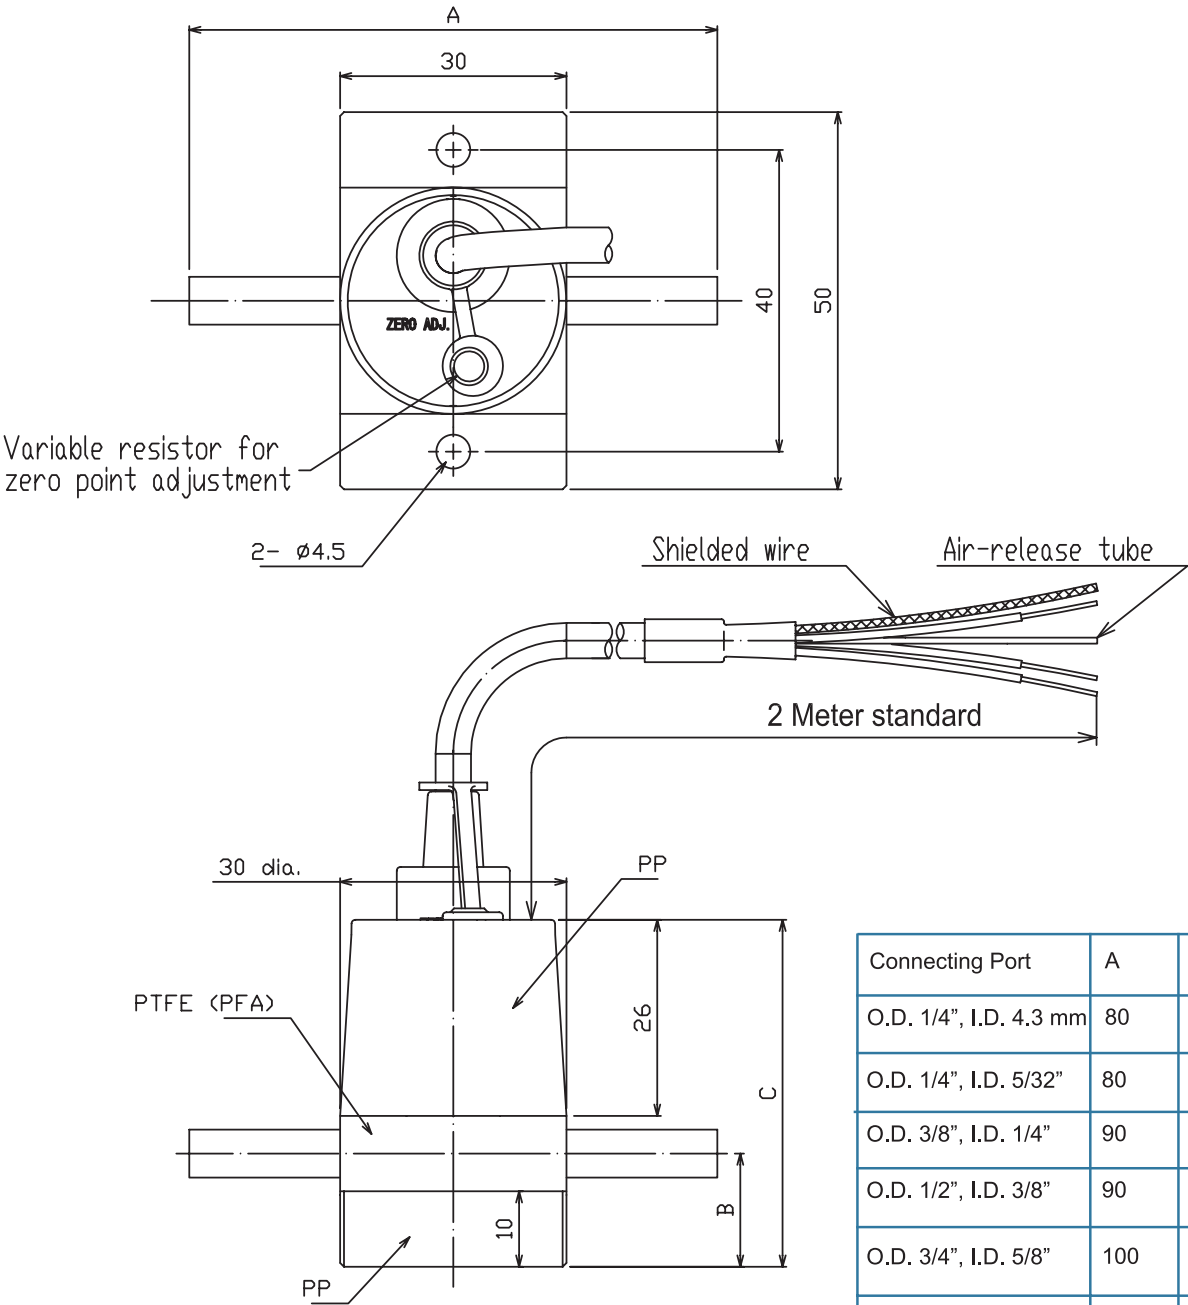

DIMENSIONAL AND CUT-AWAY DRAWINGS

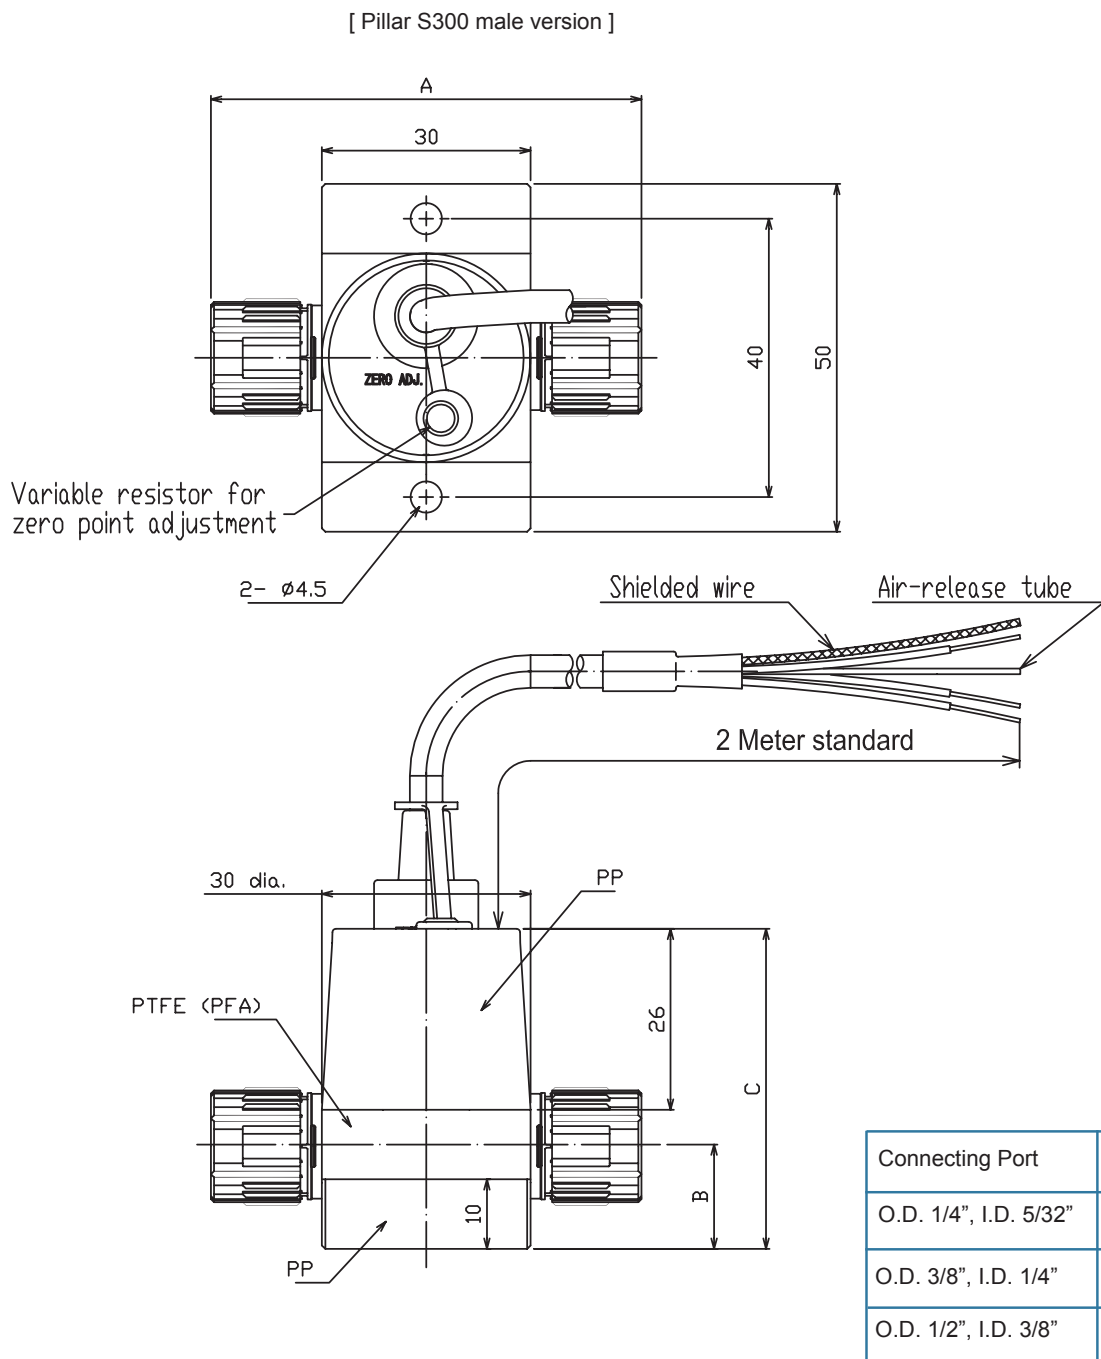

DIMENSIONAL AND CUT-AWAY DRAWINGS

