


KL-92 Series PFA/PTFE Pressure Transmitter

DESCRIPTION

The KL-92 is a pressure transducer suitable for use in monitoring pressure of various high-purity and corrosive/ aggressive fluids. The superior design provides for minimal "dead volume" which reduces the potential for contamination of the measured fluid / process. The KL-92 is available in two construction types: inline or insertion. The body construction meets IP-54 requirements.

OPERATION

The o-ring free design minimizes the generation of containment and the elution of metal, which makes it suitable for pressure monitoring in the semiconductor industry. All wetted parts are made of fluoropolymers (PFA, PTFE). The sensor is IP-54 rated to meet the application requirement for semiconductor's wet environments.

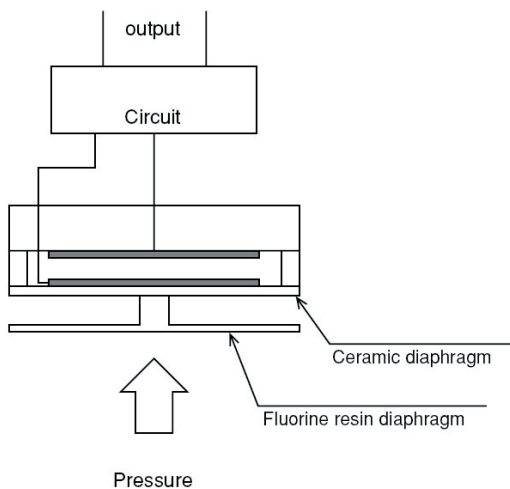

KEY FEATURES

- +/- 1 % full-scale accuracy
- All PFA/PTFE wetted part construction
- No o-ring seals or fill fluids
- Choice of end fitting: Flare, Pillar, 20S, MNPT, or Tube

APPLICATIONS


- High-purity DI water, slurry, and aggressive chemical monitoring
- Filtration condition monitoring
- General pressure monitoring

Measurement Specifications


Material of wetted parts		PFA / PTFE
Pressure Range		0 to 50 psi, to 75 psi
Allowable maximum pressure		120 psi
Temperature coefficient		+/- 0.05 % F.S. / deg. C
Power and supply current		12-24 VDC * +/-10% (30 mA DC max.)
Analog output	Voltage output	0 to 10, 0 to 5, 1 to 5 VDC
	Current output	4 to 20 mA (500 ohm max at 24 VDC)
	Output acuracy	+/- 1 % F.S.
	Response time	Within 5 ms
Connection types		Flaretek, Super Pillar 300, Tube ends, MNPT
Connection sizes		1/4", 3/8", 1/2", 3/4"
Operating fluid temperature range		10 to 80°C
Operating humidity range		35 to 85 % RH (non-condensing)
Protection		IP-54 (Splash Proof)
Cable length		2 m
Weight		140 g (with cable)



DIMENSIONAL AND CUT-AWAY DRAWINGS

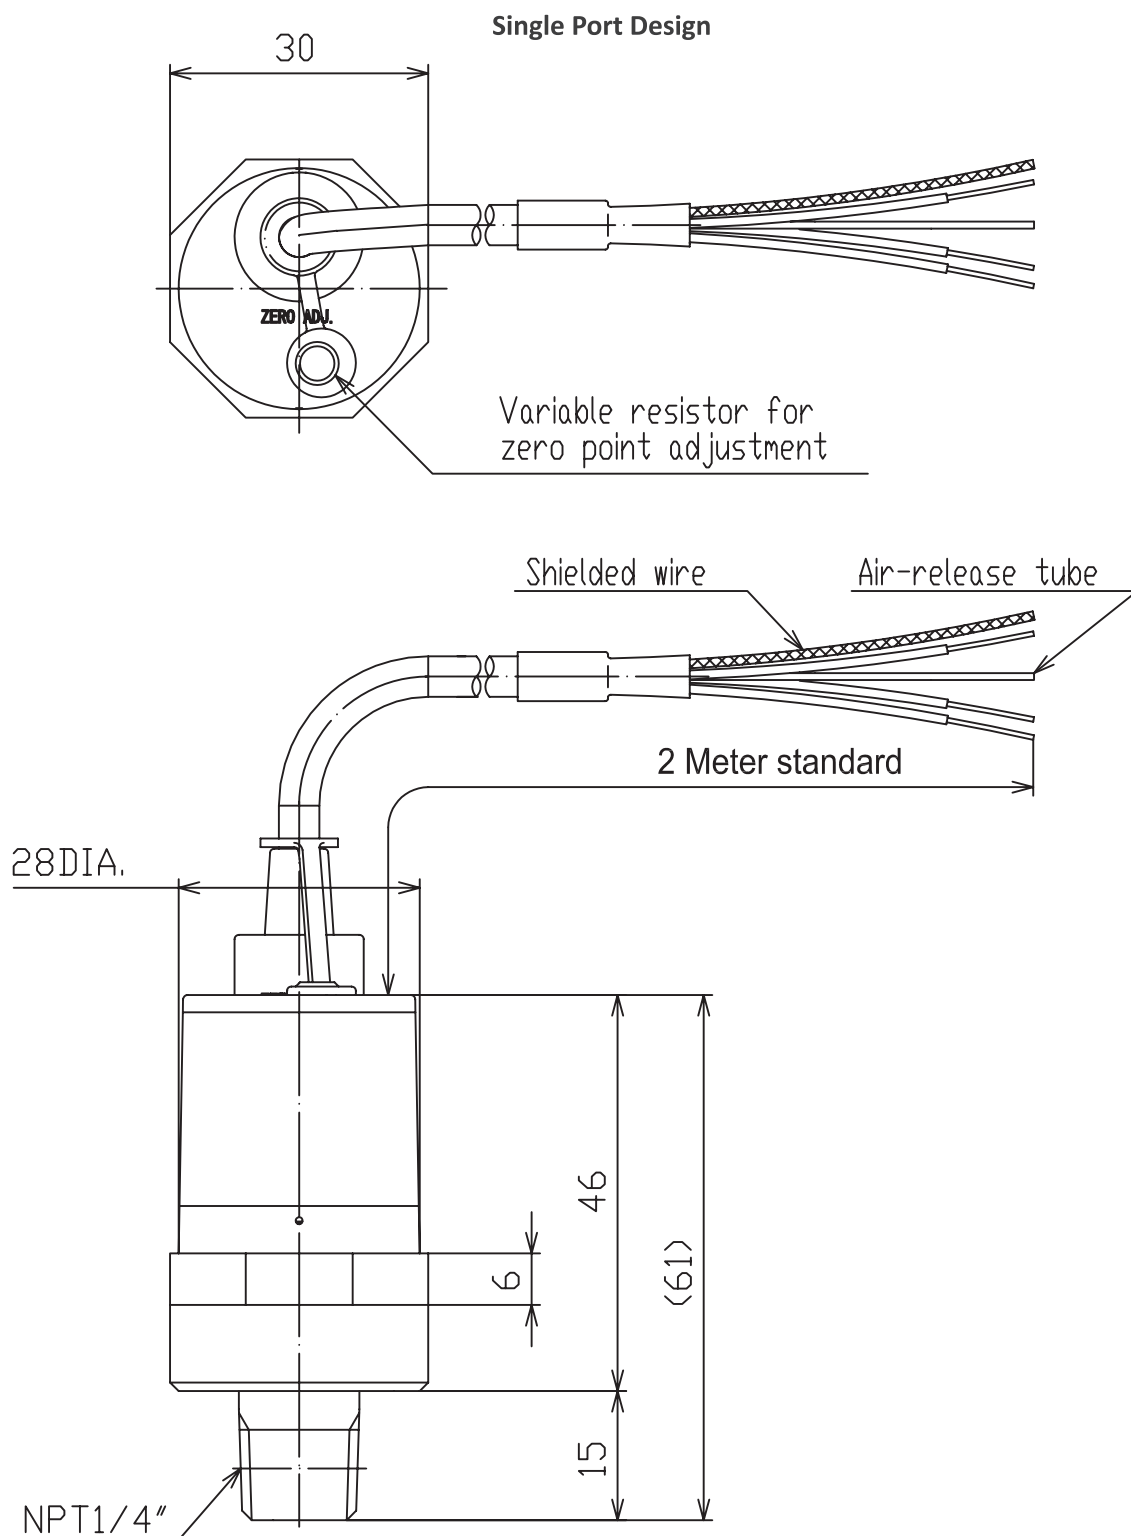

DIMENSIONAL AND CUT-AWAY DRAWINGS

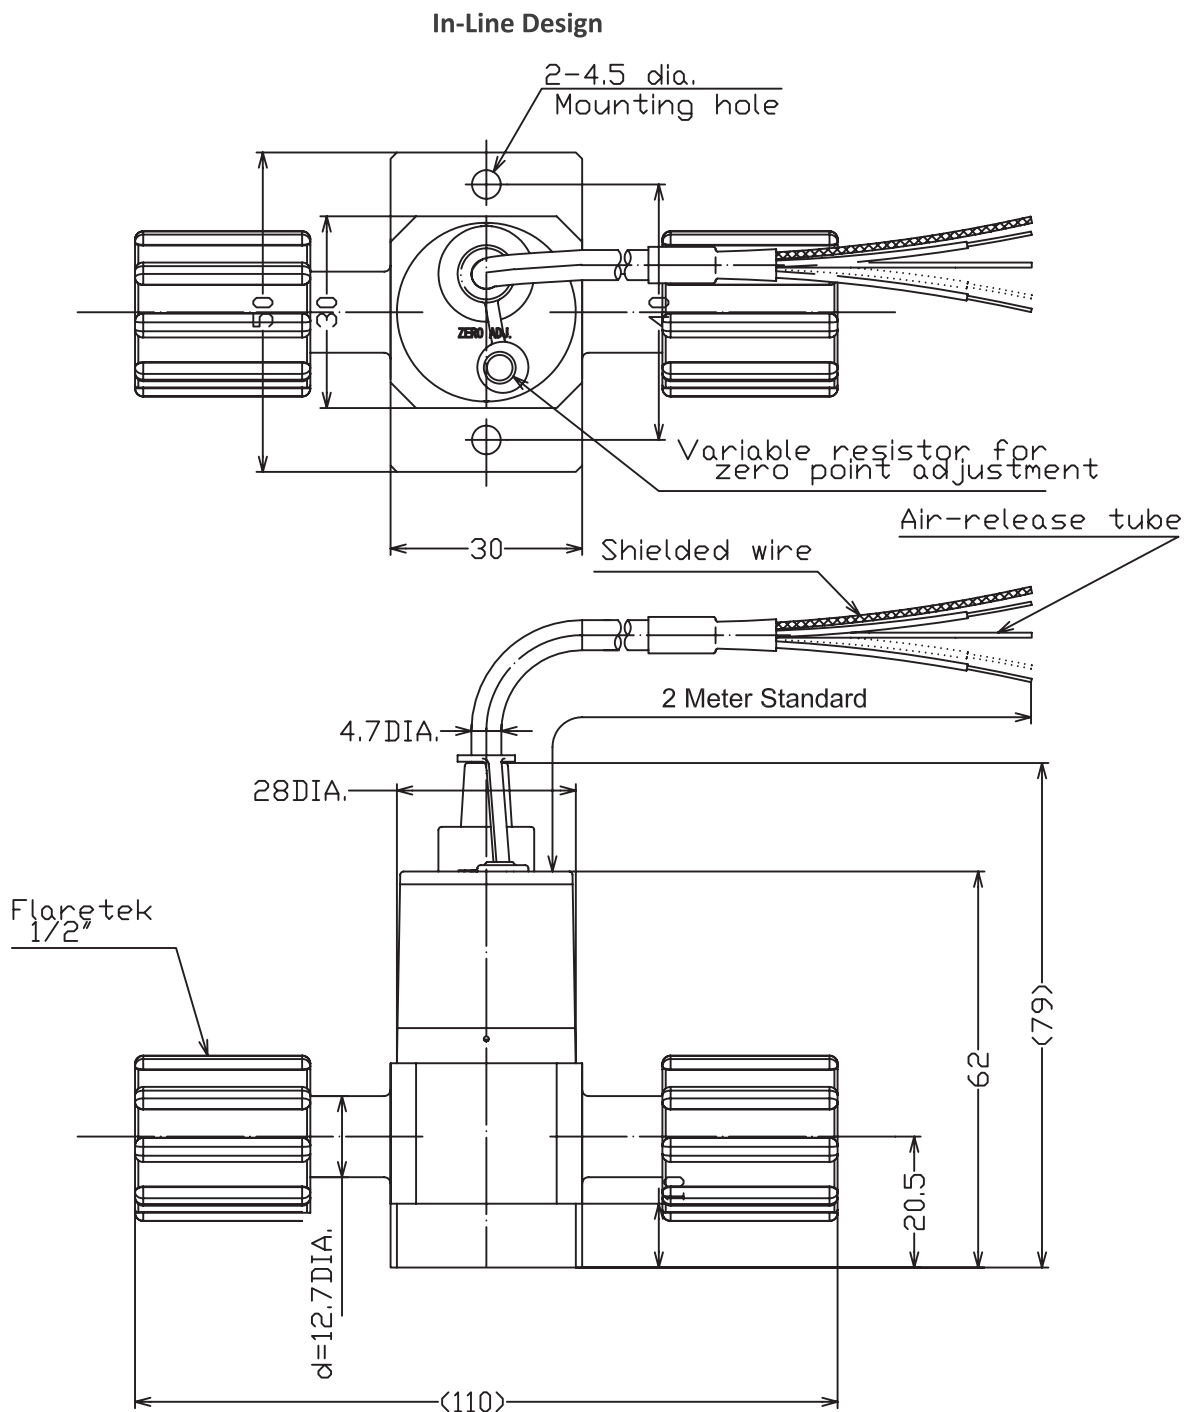

Ordering Information

Model Code										Description
KI-92	-	M		-				-		Pressure Transducer
	-									
		M								
			1							In-Line
			2							Single port
Connection Type			0							Flaretek
			1							Tube
			2							Pillar Super 300 (Female)
			3	* Inline type only						Pillar Super 300 (male)*
			4							20S
			5	* Single port (1/4", 3/8") type only						MNPT
			6							Flaretek (Male)
Size			1							1/4"
			2							3/8"
			3							1/2"
			4	* Inline type only						3/4"
			5							
			6							
					-					
Input/Output					1		24 VDC	0 ~ 10 VDC		
					2		24VDC	4 ~ 20 mA		
					3		12 ~ 24 VDC	1 ~ 5 VDC		
					4		12 ~ 24 VDC	0 ~ 5 VDC		
						-				
Pressure Range							50	0 ~ 50 psi		
							75	0 ~ 75 psi		
Cable							1	Shielded Cable / 2m		
							2	Turk Cable / 1.2m		

KL92 AVAILABLE COMBINATIONS

Installation Type I			Inline Type				Single Type			
Port DIA			1/43	/8	1/23	/4	1/43	/8	1/23	/4
Fittings			5/32	1/43	/8	5/85	/321	/4	3/85	/8
Flaretek	FP	TFE	○	○	○	○	○	○	○	-
Tube	-P	TFE	○	○	○	○	○	○	○	-
Pillar S300	FP	TFE	○	○	○	○	○	○	○	-
Pillar S300	MP	FA	○	○	○	○	-	-	-	-
S20	FP	TFE	○	○	○	○	○	○	○	-
MNPT	MP	FA	-	-	-	-	○	○	-	-
Flaretek	MP	FA	○	○	○	○	-	-	-	-

NB:- M is Male, F is Female (Nut Type)

- Male fittings are welded.
(Sizes are the same as KL95)

- Tube stub or MNPT are machine drilled cut

- F or MNPT Single Port Stem Type 1/4" and 3/8" are the MNPT thread sizes