

MPS-450 High-purity PFA pressure sensor

DESCRIPTION

The Malema MPS-450 Series Pressure Sensor is engineered to ensure safe, reliable, and efficient flow control for high-purity applications in the semiconductor industry. The internal flow path is designed to minimize hold up volume, while wetted components of these nonmetallic transducers are constructed using PTFE, PFA, or other similar high-purity inert materials.



KEY FEATURES

- Economical and accurate fluid pressure sensing
- Wetted materials made from PFA and FFKM for compatibility with high-purity applications
- Suitable for single-phase fluids from 0°C to 70°C
- Available in both single port and flow-through designs

APPLICATIONS

- Wet Etch
- Wet Clean
- CMP
- ECD
- Electroless Deposition
- Wet Process / Chemical Distribution Systems
- Chemical Blend Systems
- Ultra-Pure Water

AVAILABLE SIZES

Sizes	1/4"	3/8"	1/2"	3/4"	1"
Single port	✓	✓	✓		
Flow-trough	✓	✓	✓	✓	✓

Fluid connections: Tube, Pillar and Flare

PERFORMANCE SPECIFICATIONS

Accuracy	±1% FS
Repeatability	±0,5% FS
Ambient temperature	0-50°C
Media operating temperature	10°C-70°C
Measurable fluids	Gases or non-phase changing liquids
Maximum operating pressure	Depends on pressure range; typically, 2 bar over max pressure
Ingress protection class	IP64
Output options	Analog passive 4-20 mA or 0-10 V DC
Power supply	24 V DC ±10%

Electrical specifications

Output options	Analog output	Passive 4-20 mA current loop, or 0-10V DC
Power supply	24 V DC ±10%	
Power consumption	Max 30 mA @ V DC	
Cable	1 meter, 2 meter, 3 meter or custom length six-conductor cable available	


CONNECTOR SPECIFICATIONS

Color	Option I	Option J
Red	24 V DC	24 V DC
Black	Ground	Ground
Violet	-Analog (4-20 mA) PRESS, active	-Analog (0-10 V DC) PRESS, active
Blue	+Analog (4-20 mA) PRESS, active	-Analog (0-10 V DC) PRESS, active
Green	Not connected	Not connected
Orange	Not connected	Not connected

DIMENSIONAL DRAWINGS

For reference only

Single Port

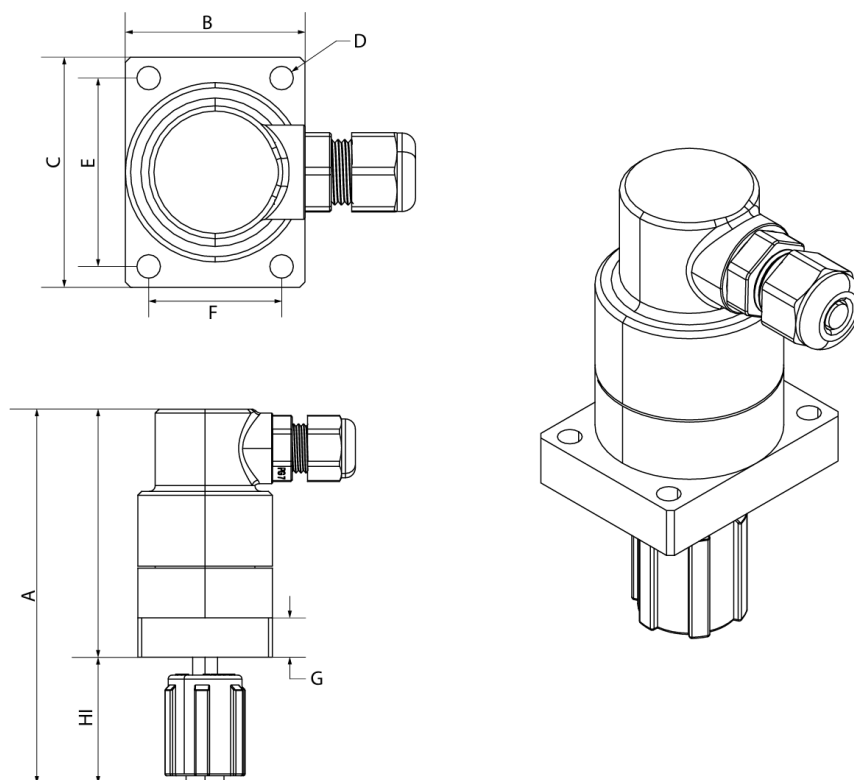


Model	A	B	C	D	E	F	G	H	I
1/4" Female Flare, Single Port	95.4 mm	34.3 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	2.2 mm	63.2 mm
1/4" Pillar S300, Single Port	84.7 mm	34.3 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	21.5 mm	63.2 mm
3/8" Female Flare, Single Port	96.6 mm	34.3 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	33.4 mm	63.2 mm
3/8" Pillar S300, Single Port	90.3 mm	34.3 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	27.1 mm	63.2 mm
1/2" Female Flare, Single Port	98.6 mm	34.3 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	35.4 mm	63.2 mm
1/2" Pillar S300, Single Port	94.5 mm	34.3 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	31.3 mm	63.2 mm

DIMENSIONAL DRAWINGS

For reference only

Flow through

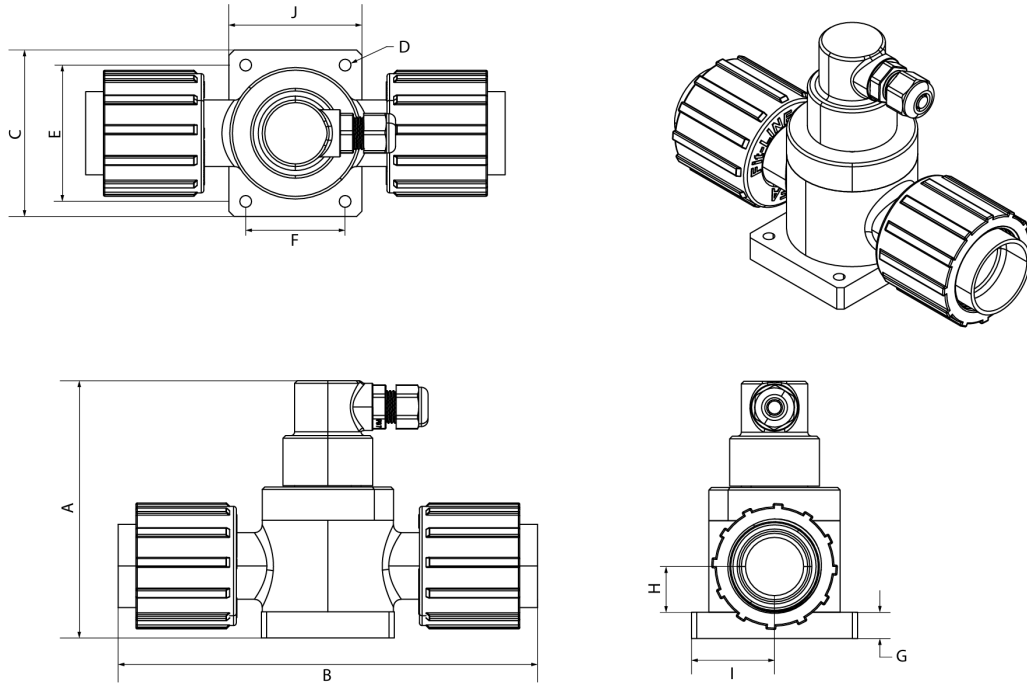

Model	A	B	C	D	E	F	G	H	I
1/4" Female Flare, Flow Through	63.2 mm	101.7 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	6.4 mm	22 mm
1/4" Pillar S300, Flow Through	63.2 mm	81.8 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	6.4 mm	22 mm
3/8" Female Flare, Flow Through	69.6 mm	106.9 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	9.5 mm	22 mm
3/8" Pillar S300, Flow Through	69.6 mm	92.2 mm	44 mm	4.5 mm	36 mm	25.4 mm	10 mm	9.5 mm	22 mm
1/2" Female Flare, Flow Through	83.2 mm	127 mm	63.5 mm	4.5 mm	52 mm	38 mm	10 mm	10 mm	31.8 mm
1/2" Pillar S300, Flow Through	83.2 mm	117.4 mm	63.5 mm	4.5 mm	52 mm	38 mm	10 mm	10 mm	31.8 mm
3/4" Female Flare, Flow Through	91.2 mm	143.1 mm	63.5 mm	4.5 mm	52 mm	38 mm	10 mm	14 mm	31.8 mm
3/4" Pillar S300, Flow Through	91.2 mm	133.9 mm	63.5 mm	4.5 mm	52 mm	38 mm	10 mm	14 mm	31.8 mm
1" Female Flare, Flow Through	98.1 mm	160.3 mm	63.5 mm	4.5 mm	52 mm	38 mm	10 mm	17.5 mm	31.8 mm
1" Pillar S300, Flow Through	98.1 mm	146.2 mm	63.5 mm	4.5 mm	52 mm	38 mm	10 mm	17.5 mm	31.8 mm

ORDERING INFORMATION

Model code								Description
MPS-450	-030	F	2	2	H	03	-S01	
Process parameters measured								Pressure sensing only
Pressure range	-007							0-7.5 psig
	-030							0-30 psig
	-100							0-100 psig
	-zzz							Custom range
Configurations	S							single port
	F							Flow through
Size	2							1/4"
	3							3/8"
	4							1/2"
	6							3/4" (not available in single port design)
	8							1" (not available in single port design)
Fluid connection	0							20 mm length tube stub
	1							Female flare
	2							Female Pillar
Input/output	I							6 wire cable (power, 1 x analog 4-20mA DC o/p)
	J							6 wire cable (power, 1 x analog 0-10 V DC o/p)
Cable length	01							1 meter
	2							2 meter
	03							3 meter
	ZZ							custom length
Ordering extension (standard and custom options)	-S01							Standard version
	-XXX							For any custom options, the factory will assign a 3 digit unique ID in place of XXX