VF-3000 Vortex Flow Sensor


DESCRIPTION

The VF-3000 Flow Sensor offers a cost-effective instrument for the measurement of liquid flow.

A simple and clean design makes the VF-3000 a good choice for the measurement of ultra-pure water, DIW (de-ionized water) in semiconductor manufacturing plants.


Current output model, Pulse output model and Display model with current / alarm outputs are available.

All PFA fused construction version has been added, the VF-3000 is an ideal choice for plant where the extreme cleanness of pipe is required.

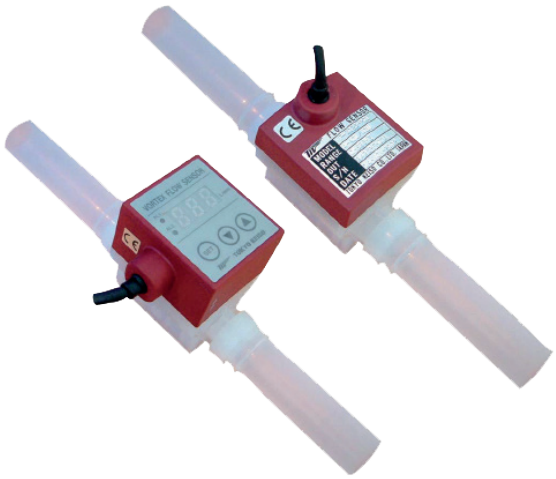

OPERATING PRINCIPLE

A bluff body or Shedder bar in the flow generates a street of vortices downstream. The VF-3000 Flow Sensor measures the flow rate by counting the number of vortices with a piezoelectric sensor.

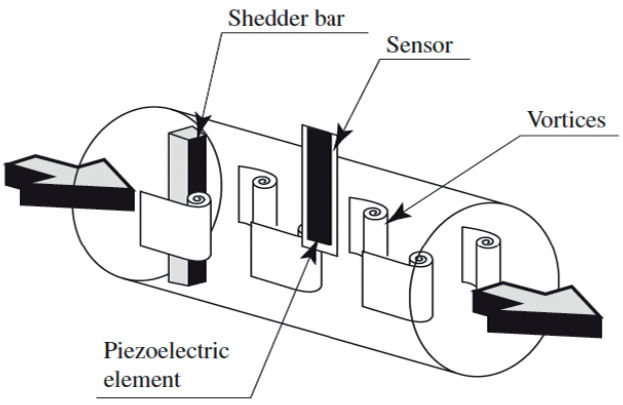

KEY FEATURES

- Wide flow range enough to cover minimum 0.3 L/min and maximum 150 L/min.
- Designed for Cleanness: Sensor body is made of New PFA (420HP-J). All PFA fused construction version has been lined up and designed to eliminate the deposit.
- No Maintenance Cost: Since the VF-3000 has no moving parts, no maintenance is needed.
- Simple and Compact Design: The VF-3000 Flow Sensor is assembled with a few pieces of components. The sensor body and Shedder bar (vortex generator) are molded as one component. This design approach has reduced the cost as well as the size and weight of the flowmeter.
- CE Marking: The VF-3000 meets the EMC directive for CE mark.
- 3 models are lined-up. The function can be selected depending upon the application.

Display + Current output model: 4 to 20mA output (3-wire), LED indicator, 2 points alarm output (Open collector)

Current output model: 4 to 20mA output (3-wire)

Pulse output model: Open collector output (Unscaled pulse)

Note: The flow range of All PFA fused construction version is 0.3 to 2.5L/min, 0.5 to 4L/min or 15 to 150L/min.

www.sps-international.com | sales@sps-international.com
www.sps-polos.com | sales@sps-polos.com
www.waferhandlingsystems.com | sales@waferhandlingsystems.com
www.esproflow.com | sales@esproflow.com

STANDARD SPECIFICATIONS

Specification			Model		
			Current Output Model	Pulse Output Model	Display + Current output Model
			VF-301□	VF-302□	VF-303□
Measuring fluid			Ultra-pure water, Water, Chemical liquid (low viscosity)		
Flow range / Conn. size*1	VF-30□0		0.3 to 2.5L/min or 0.08 to 0.65GPM ／ 3/8"		
	VF-30□1		0.5 to 4L/min or 0.13 to 1GPM ／ 3/8"		
	VF-30□2		2 to 16L/min or 0.5 to 4GPM ／ 3/4"		
	VF-30□3		4 to 40L/min or 1 to 10GPM ／ 3/4"		
	VF-30□5		15 to 150L/min or 4 to 40GPM ／ 1"		
Process connection			PFA tube end [Standard] or PFA tube fitting [Refer to Table of MODEL Code]		
Accuracy*1			±3%F.S.		±3%F.S. (1digit)
Reproducibility			±0.5%F.S.		
Fluid pressure			0 to 0.5MPa [Refer to Figure 1]		
Fluid Temperature			0 to 90°C		0 to 90°C [Refer to Figure 2]
Ambient Temperature			0 to 50°C		0 to 50°C [Refer to Figure 2]
Ambient Humidity			5 to 90%RH		
Power supply			10.8 to 26.4V DC		
Power consumption			1W	0.5W	2W
Display	Flow rate		-		3-digit LED
	Alarm		-		2 LED (Alarm-1, Alarm-2)
Display resolution	VF-3030/3031		-		0.01L/min or 0.01 GPM
	VF-3032		-		0.1L/min or 0.1 GPM
	VF-3033		-		0.1L/min or 0.1 GPM
	VF-3035		-		1L/min or 1 GPM
Output			● Current output 4 to 20mA (3-wire) Load: 0 to 250 ohms at 12V DC 250 to 600 ohms at 24V DC [Refer to Figure 3] Damping Time Constant: 1s (63% Response)	● Pulse output [Unscaled pulse] Open collector: Max. 10mA/30V DC Pulse duty factor: approx.50% Output frequency at 100% flow VF-3020 750Hz at 2.5L/min VF-3021 867Hz at 4L/min VF-3022 860Hz at 16L/min VF-3023 596Hz at 40L/min VF-3025 900Hz at 150L/min	● Current output 4 to 20mA (3-wire) Load: 0 to 250 ohms at 12V DC 250 to 600 ohms at 24V DC [Refer to Figure 3] Response: Sampling time 0.5S + Damping time constant 2.5S ● Alarm output Alarm-1 and Alarm-2 Open collector Max. 80mA, 30V DC Hysterisis : equal to display resolution
Cable			0.2mm² x 3C (AWG24), 3m, Outside diameter 3.5mm (Soldered end finish)		0.2mm² x5C (AWG24) 3m, Outside diameter 4.5mm (Soldered end finish)
Enclosure Classification			IP64		
Material	Wetted part	Sensor body	New PFA (420HP-J)		
		Tube	New PFA (equivalent to 450HP)		
		Fitting	PFA or New PFA		
		Sensor	Piezoelectic element molded with New PFA (420HP-J)		
		O-ring	Perfluoro elastomer (PF) or without o-ring (Fused construction for sensor part)*2		
	Cover		Poly-butylene trephthalate (PBT)		
	Cable sheath		Heat resistant PVC		
Mass	Meter		80 to 220g (Mass changes depending on type of fitting)		100 to 240g (Mass changes depending on type of fitting)
	Cable		75g		90g
Min. Straight Pipe Run	VF-30□0/30□1		50mm upstream (Not required downstream)		
	VF-30□2		80mm upstream (Not required downstream)		
	VF-30□3				
	VF-30□5		Upstream 180mm, Downstream 50mm		

*1 Conditions for calibration: Fluid: Water, Fluid temperature: 25°C; Ambient temperature: 23°C, Supply voltage: 24 VDC.
*2 The flow range of All PFA fused construction version is 0.3 to 2.5 L/min, 0.5 to 4 L/min or 15 to 150 L/min.

SPS
www.sps-international.com | sales@sps-international.com
www.sps-polos.com | sales@sps-polos.com
www.waferhandlingsystems.com | sales@waferhandlingsystems.com
www.esproflow.com | sales@esproflow.com

Fluid Pressure and Temperature




Figure 1

Fluid and Ambient Temperature

(for Display model VF-303□)






Figure 2

WIRING DIAGRAM


● Current Output Model (VF-301□)

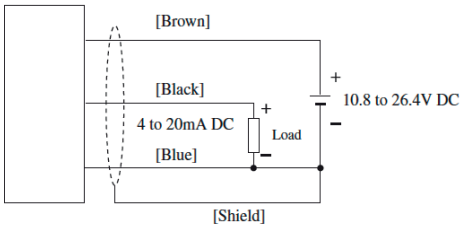

● Pulse Output Model (VF-302□)

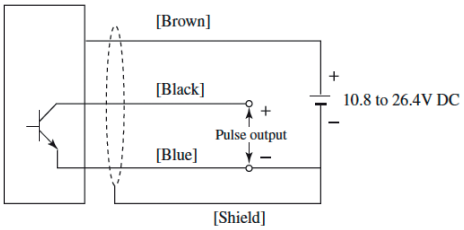

● Display + Current Output Model (VF-303□)

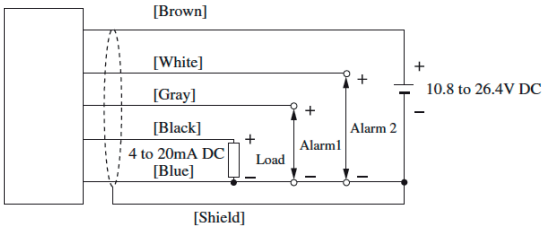

Load Resistance Range for Current Output

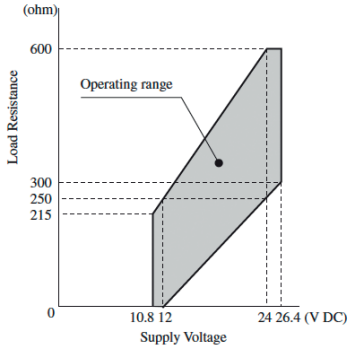


Figure 3


MODEL CODE

Model code						Description
VF - 30	□	□	- □	□	□	
Output	1					Current output : 4-20mA DC
	2					Pulse output : Open collector (Unscaled pulse)
	3					Display : Flow rate (3-digit LED), Alarm (2 LED) Current output : 4 to 20mA DC Alarm output : Open collector (2 points)
Flow range / Connection size		0				0.3 to 2.5L/min or 0.08 to 0.65GPM ／ 3/8"
		1				0.5 to 4L/min or 0.13 to 1GPM ／ 3/8"
		2				2 to 16L/min or 0.5 to 4GPM ／ 3/4"
		3				4 to 40L/min or 1 to 10GPM ／ 3/4"
		5				15 to 150L/min or 4 to 40GPM ／ 1"
O-ring			- P			Perfluoro erastomer (PF) [VF-30□2, VF-30□3]
			- 0			Without o-ring (Fused construction for sensor part) [VF-30□0, VF-30□1, VF-30□5]
Process Connection				0		PFA Tube end [Standard]
				1		FLARETECK
				2		PILLAR [SUPER TYPE PILLARFITTING]
				3		FINALLOCK
				4		Flowell [20 Series Tube Fittings]
				5		Flowell [20A Series Tube Fittings]
				6		Flowell [60 Series Tube Fittings]
				7		PILLAR [SUPER 300 TYPE PILLARFITTING]
Flow Unit					1	L/min
					2	GPM


www.sps-international.com | www.sps-polos.com | www.waferhandlingsystems.com | www.esproflow.com
sales@sps-international.com | sales@sps-polos.com | sales@waferhandlingsystems.com | sales@esproflow.com

OUTLINE DIMENSIONS


● VF-301□
● VF-302□
(Tube end type)

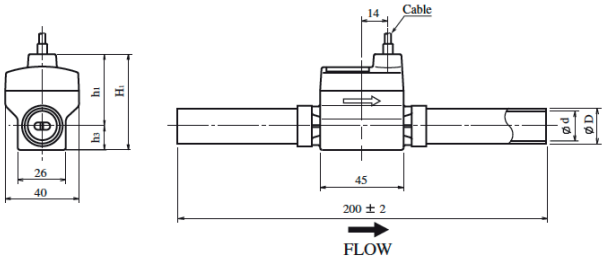


● VF-303□
(Tube end type)

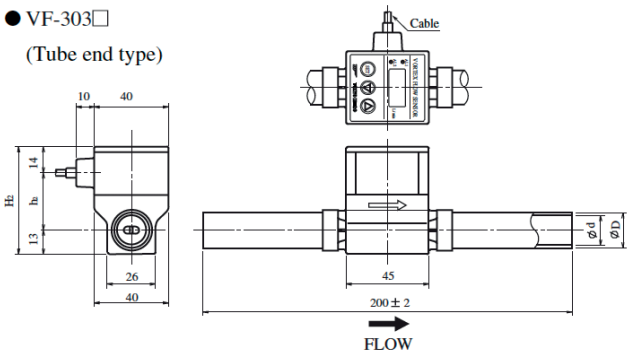

● VF-301□
● VF-302□
(Fitting type)

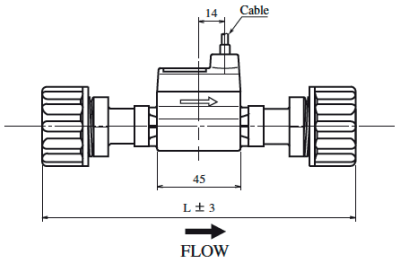

● VF-303□
(Fitting type)



Unit : mm

Model	Conn. size	Dimension														
		L (Refer to MODEL CODE for Process connection)								D	d	H_1	h_1	H_2	h_2	h_3
		-□0□	-□1□	-□2□	-□3□	-□4□	-□5□	-□6□	-□7□							
VF-30□0 VF-30□1	3/8"	200	170	160	165	150	150	200	159	9.53	6.35	52	39	58	31	13
VF-30□2	3/4"	200	185	190	170	165	165	220	189	19.05	15.9	52	39	58	31	13
VF-30□3	3/4"	200	185	190	170	165	165	220	189	19.05	15.9	53.5	40.5	59.5	32.5	13
VF-30□5	1"	250	225	235	210	200	200	255	246	25.4	22.2	67	47	73	39	20

Note: "L" connection size is subject to being changed without notice, depending on the size change by joint maker.

ORDERING INSTRUCTION

Specify the following when ordering:

1. Model code
2. Fluid name

*Specification is subject to change without notice.

www.sps-international.com | www.sps-polos.com | www.waferhandlingsystems.com | www.esproflow.com
sales@sps-international.com | sales@sps-polos.com | sales@waferhandlingsystems.com | sales@esproflow.com